



Flexible Expandable Conveyor

Product Introduction

www.damonroller.com

Version: 202407V2(1)



One of the global leading manufacturer of flexible expandable conveyor

With professional experience for decades, Damon Industry provides support for global companies to achieve efficient logistics.

Flexible expandable conveyors are used in a variety of industries including logistics distribution, manufacturing and other industries. It can be moved, expanded, or several sets can be linked by hooks to form longer conveying length, which can reduce labor strength and downsize personnel required. It has advantage in flexibility and movability over fixed conveyors. Flexible expandable conveyors can handle different sizes of boxed package with flat bottom.

We have three types - non-driven roller expandable conveyor, non-driven skate wheel expandable conveyor and motorized roller expandable conveyor. We constantly update and improve the design and its components based on customer's feedback and on-site analysis. Globally we have gained the consistent trust of our customers.

Non-Driven Roller Expandable Conveyor

03-04



Conveying surface	Φ38 / 50mm zinc plated steel roller or SS304 roller
Expansion Ratio	1:2.5
Width	FWA-38: 500 / 600 mm, FWAH-50: 600 / 750 / 900mm

Non-Driven Skate Wheel Expandable Conveyor

05-06



Conveying surface	Φ48.5mm plastic skatewheel or Φ49mm zinc plated steel skatewheel
Expansion Ratio	1:3
Width	500 / 600 mm

Motorized Roller Expandable Conveyor

07-08



Conveying surface	Φ50 zinc plated steel roller, driven by Poly-vee belt or O-belt
Expansion Ratio	1:2.5
Width	600 / 750 / 900 mm

⚙️ If you have different width or height requirement, please contact us.

- ⚠️ –Environmental conditions: indoor level ground
 –Temperature: 0~40℃
 –Humidity: 30%~70% RH without condensation



- high weight burden
- smooth and quiet running
- suitable for middle or big items

Specifications


Φ38 single roller expandable conveyor

Model	Unit	Length mm	Width mm	Height mm	Load/Unit kg (no shock load)
FWA-38	2	980-2480	500 600	700-1000 550-700	80
FWA-38	3	1350-3510			
FWA-38	4	1720-4540			
FWA-38	5	2090-5570			
FWA-38	6	2460-6600			

Φ50 single roller expandable conveyor

Model	Unit	Length mm	Width mm	Height mm	Load/Unit kg (no shock load)
FWAH-50	2	1120-2700	600 750 900	700~1000 550~700	100
FWAH-50	3	1540-3800			
FWAH-50	4	1960-4900			
FWAH-50	5	2380-6000			
FWAH-50	6	2800-7100			

Roller



Tube Dia.(D)	t	Shaft Dia.(d)	Tube Material	
			Zinc plated steel	SS304
Φ38	1.2	Φ12	√	○
Φ50	1.5	Φ12	√	○


- Design of polymer bearing housing and end cap
- Beautiful, quiet operation

Order Example

FWA	S	38	G2	60	5	70
Model	Roller Material	OD of Roller	Optional Configuration	Width	Unit No.	Height
FWA	Empty: Zinc Plated Steel	38: Φ38	Empty: None	50: 500	2: 2 units	70: 700~1000
FWAH	S: SS304	50: Φ50	G2: Guide Wheels	60: 600	3: 3 units	55: 550~700
				75: 750		
				90: 900		

○—Available Configuration

Non-driven Skate Wheel Expandable Conveyor

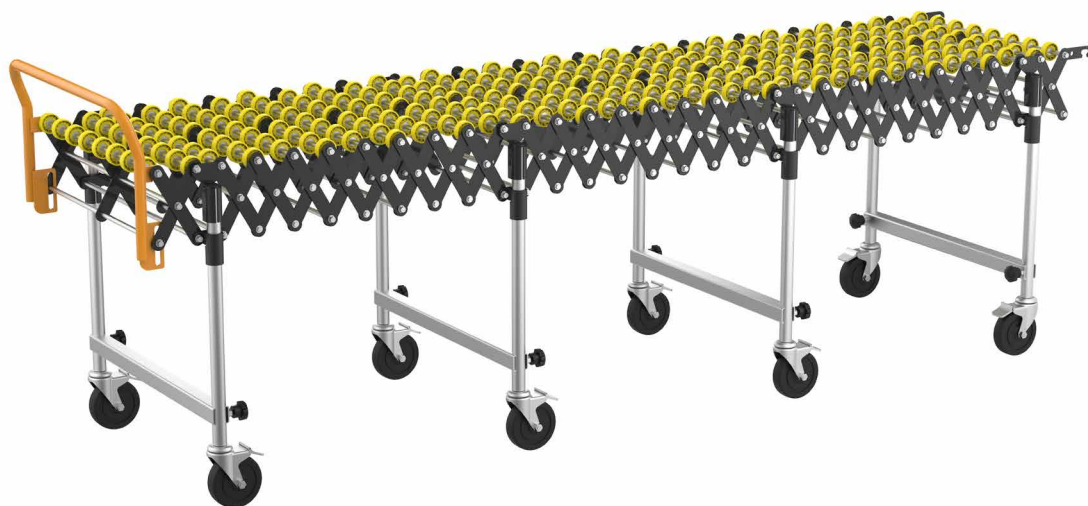

- high expansion ratio, space saving
- light weight, fluent rotating
- better for curve situation
- suitable for middle or small items

Specifications

Φ48.5 plastic skatewheel expandable conveyor

- For light weight items, bottom material easy to wear and tear.


Model	Unit	Length mm	Width mm	Height mm	Load/Unit kg (no shock load)
FWC-P	2	870-2480	500 600	700~1000 550~700	70
FWC-P	3	1190-3510			
FWC-P	4	1510-4540			
FWC-P	5	1830-5570			
FWC-P	6	2150-6600			

Φ49 steel skate wheel expandable conveyor

- For middle weight items, hard bottom material.

Model	Unit	Length mm	Width mm	Height mm	Load/Unit kg (no shock load)
FWC-C	2	870~2480	500 600	700~1000 550~700	70
FWC-C	3	1190~3510			
FWC-C	4	1510~4540			
FWC-C	5	1830~5570			
FWC-C	6	2150~6600			

Skate wheel



Material	D	W
ABS	Φ48.5	16

plastic skate wheel



Material	D	W
Zinc Plated Steel	Φ49	16

steel skate wheel

Order Example

FWC	P	G2	60	6	70
Model	Skatewheel Material	Optional Configuration	Width	Unit No.	Height
	P: Plastic	Empty: None	50: 500	2: 2 units	70: 700~1000
	C: Steel	G2: Guide Wheels	60: 600	3: 3 units	55: 550~700
					



- 90W strong power
- forward and reverse rotating stepless speed regulation
- linkage control up to three sets
- voltage option 220V/380V/400V



Specifications

Motorized Roller Expandable Conveyor (Driven by Poly-vee belt)

- Transport speed as 10–35m/min, Max weight as 60kgs/unit.



Model(Poly-vee belt)	Unit	Length mm	Width mm	Height mm	Load/Unit kg (no shock load)
FWDP-50	2	1120–2700	600 750 900	700~1000	60
FWDP-50	3	1540–3800			
FWDP-50	4	1960–4900			
FWDP-50	5	2380–6000			
FWDP-50	6	2800–7100			

*If you need the conveyor comply with CE standard, please contact us.

Motorized Roller Expandable Conveyor

08


Motorized Roller Expandable Conveyor (Driven by O-belt)

- Transport speed as 10–35m/min, Max weight as 50kgs/unit.




Model(O-belt)	Unit	Length mm	Width mm	Height mm	Load/Unit kg (no shock load)
FWDR-50	2	1120–2700	600 750 900	700~1000	50
FWDR-50	3	1540–3800			
FWDR-50	4	1960–4900			
FWDR-50	5	2380–6000			
FWDR-50	6	2800–7100			

Roller

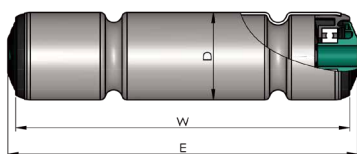

Double Grooved Conveyor Roller

Tube Dia.(D)	t	Shaft Dia.(d)	Tube Material	
			Zinc plated steel	SS304
Φ50	1.5	Φ12	√	○

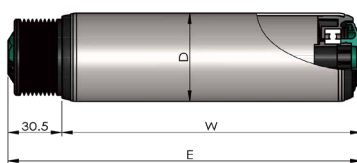

Poly-Vee Conveyor Roller

Tube Dia.(D)	t	Shaft Dia.(d)	Tube Material	
			Zinc plated steel	SS304
Φ50	1.5	Φ12	√	○

*PVC sleeve available for better surface friction.

Order Example

FWDP	—	S		50	—	G2	—	60	—	4	—	70
Model		Roller Material		OD of Roller		Optional Configuration		Width		Unit No.		Height
FWDP:Poly-Vee		Empty:Zinc Plated Steel				Empty :None		60: 600		2: 2 units		70: 700~1000
FWDR:O-belt		S:SS304				G2:Guide Wheels		75: 750		3: 3 units		
		P:PVC Sleeve						90: 900				

O——Available Configuration




• Hutchinson Poly-Vee belt




• Handle made by circular tube, can work as package stop.



• Quick Connector, linkage control up to 3 sets 21 meters length

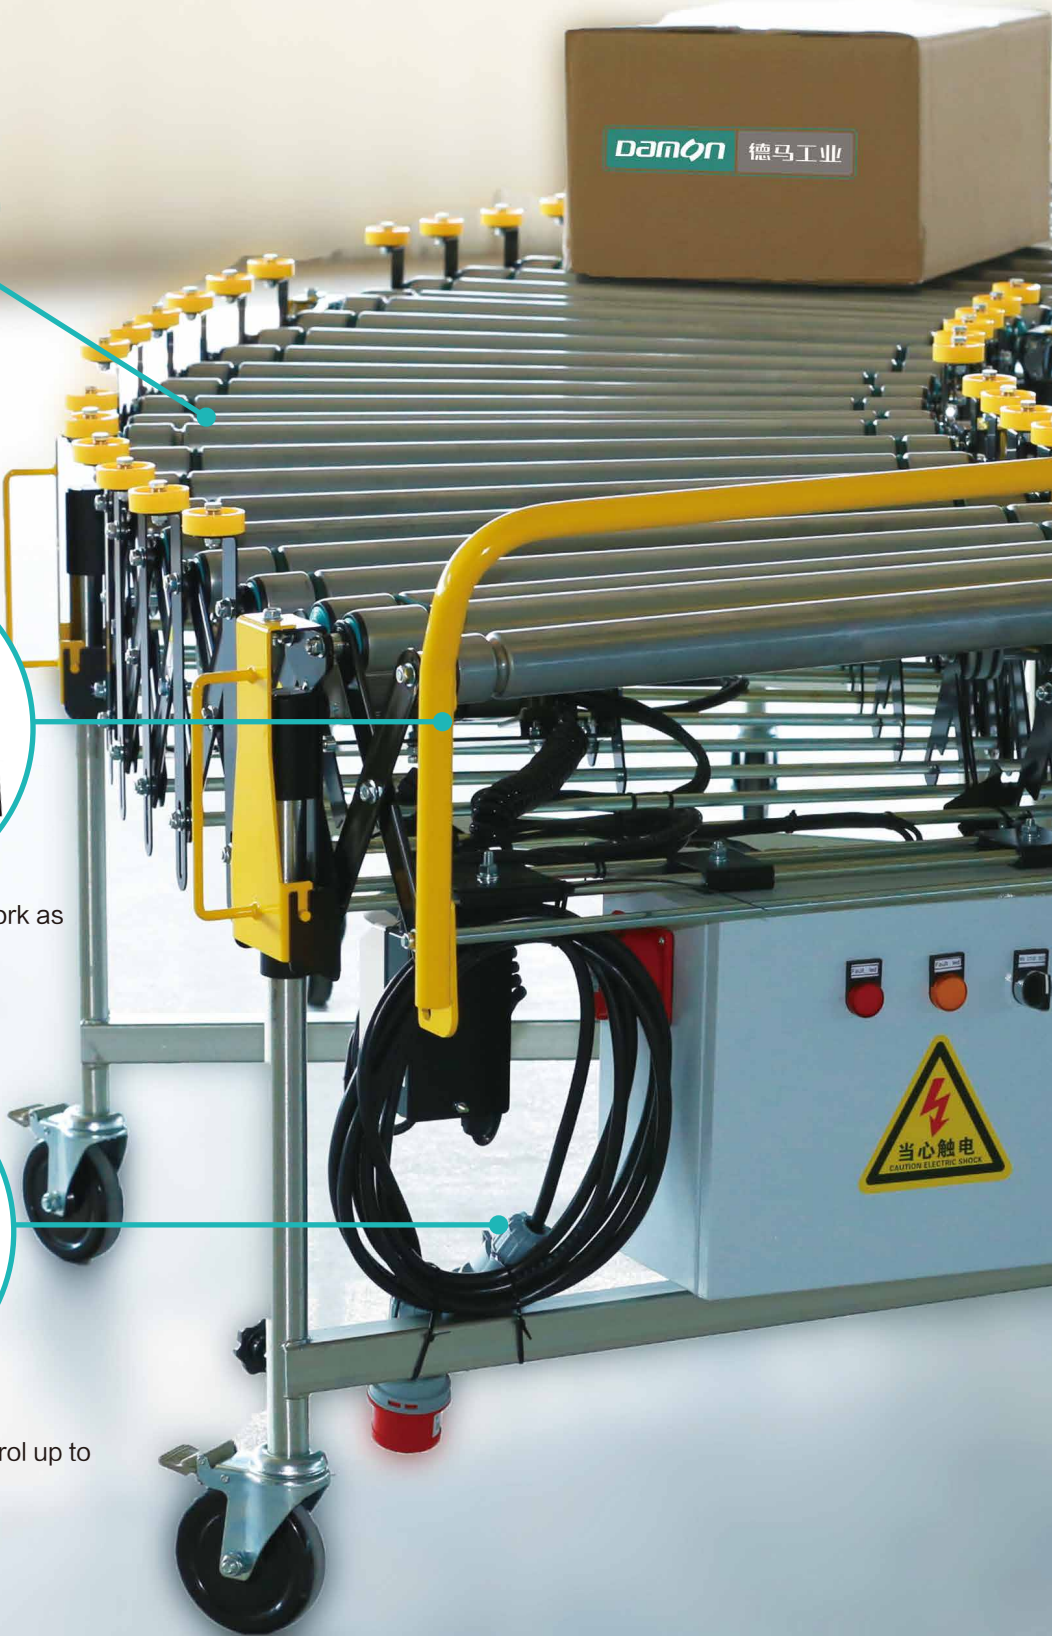

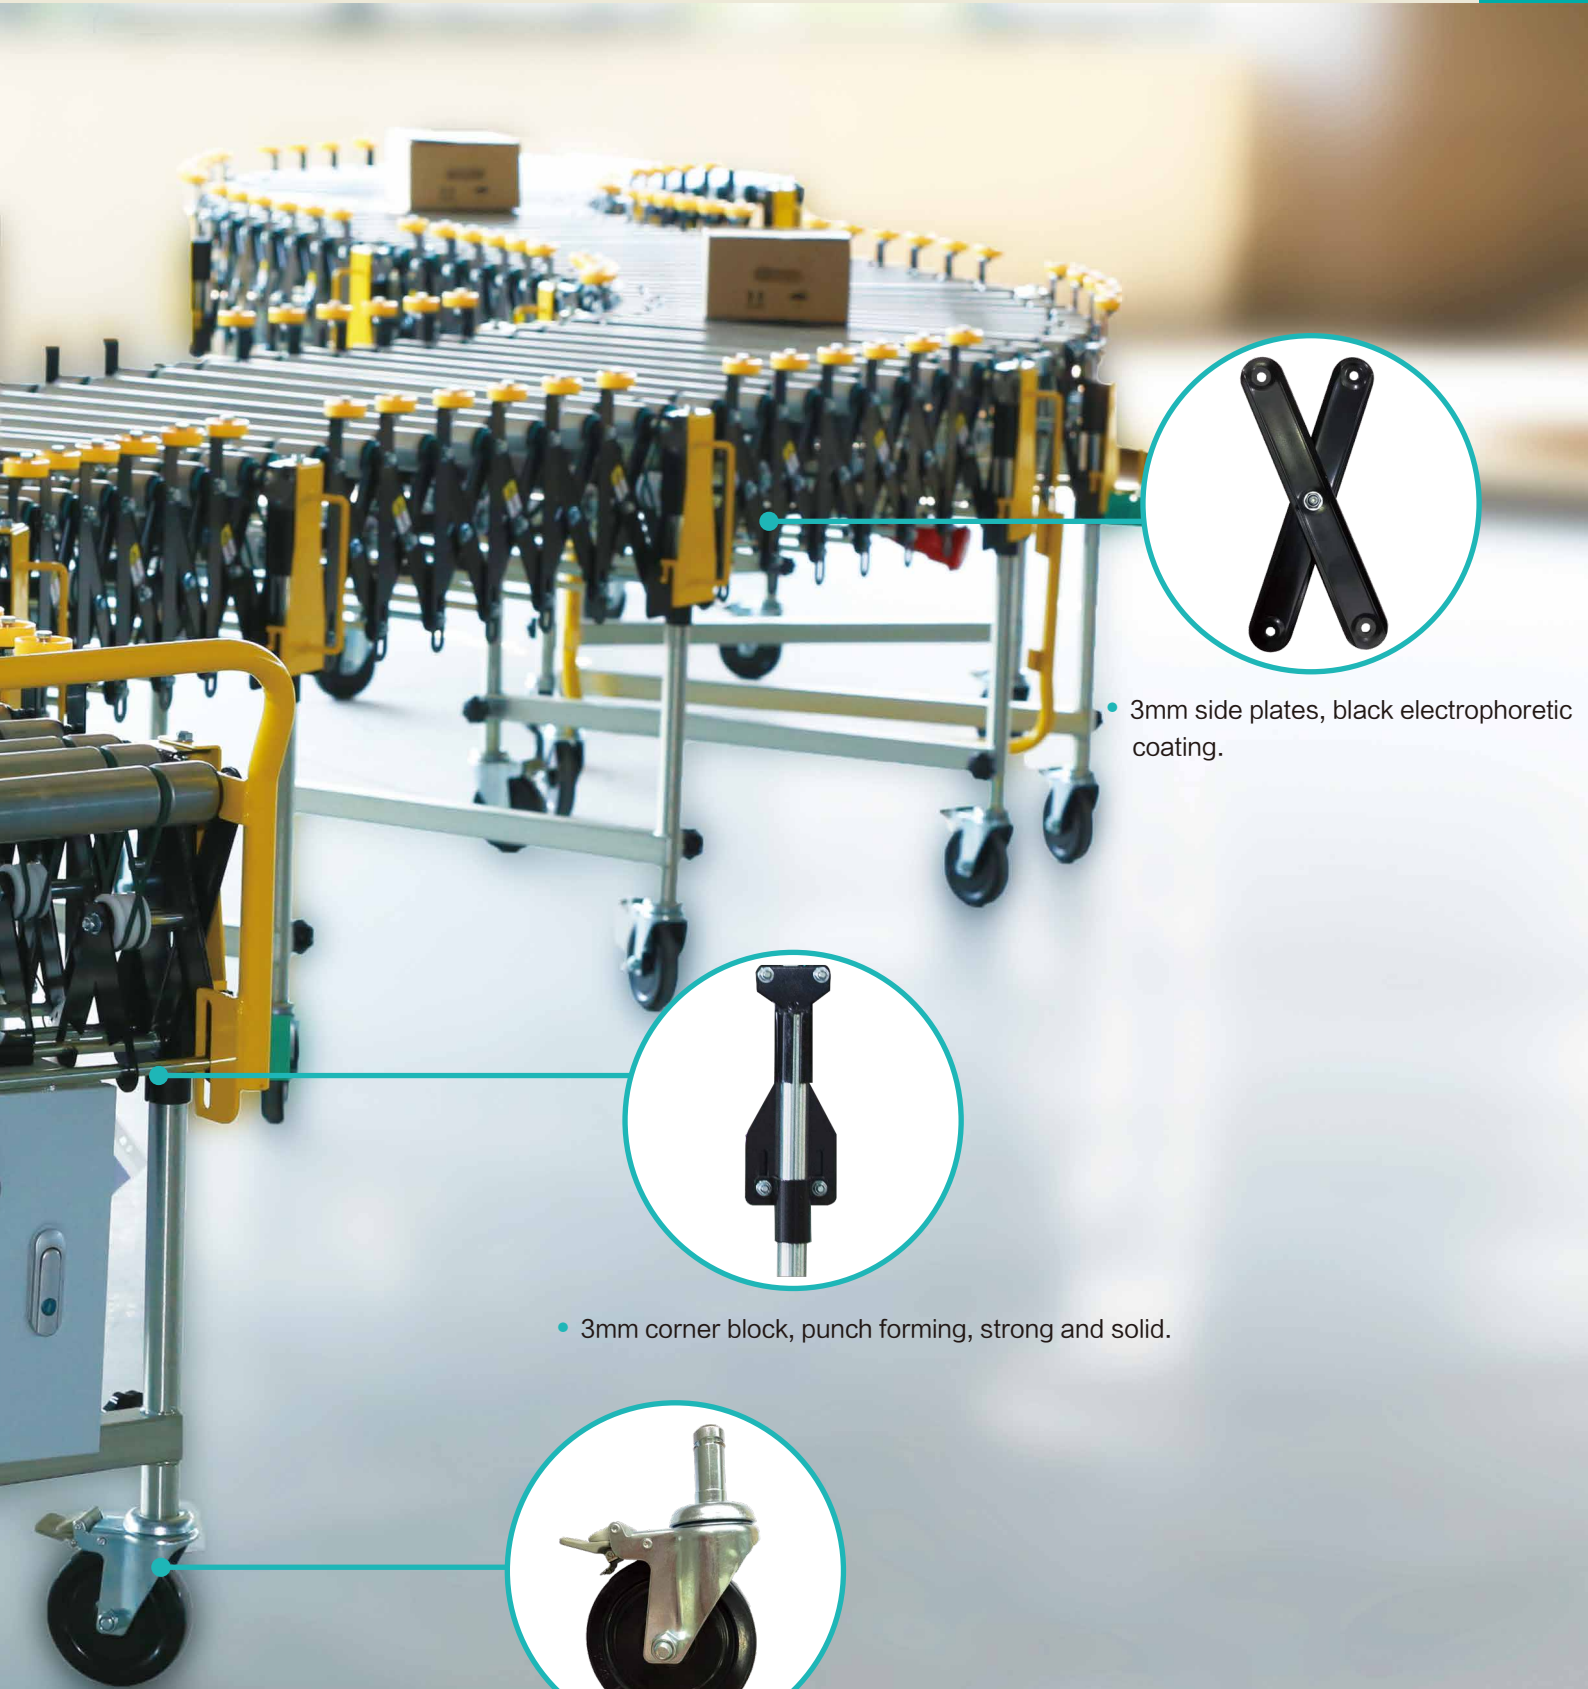

• 3mm side plates, black electrophoretic coating.



• 3mm corner block, punch forming, strong and solid.



• OD125mm nylon brake castor, firm and reliable.



ZHEJIANG DAMON INDUSTRIAL EQUIPMENT CO., LTD

Address: Shangqiang Industrial Park, Daixi, Huzhou, China

Tel.: +86-0572-3826 065/066

Fax: +86-0572-3826 080

Email: sales@damonroller.com

Website: www.damonroller.com



LinkedIn

Romania

Damon Industrial Europe Srl

Address: Apahida, Libertatii Str., No. 21, 407035, Cluj, Romania

Tel: +0040-769652317

Email: sales@damonroller.ro

Web: www.damonroller.com

Australia

Damon Australia Pty Ltd

Address: 30 Grasslands Avenue Craigieburn VIC 3064, Australia

Tel: +0061-393337034

Fax: +0061-393084896

E-mail: info@damon-group.com.au

Web: www.damon-group.com.au

America

DA Roller Corporation

Address: 4664 Brate Dr, Suite 400, West Chester, Oh 45011, USA.

Tel: +001-5138981850

Email: dateam@daroller.com

Web: www.daroller.com

Japan

Kyowa Manufacturing Co., Ltd.

Address: 570-10 Kubota-cho, Kasai-city, Hyogo pref. 675-2364 JAPAN

Tel: +0081-790420601

Fax: +0081-790424895

E-mail: sales@pulseroller.com

Web: www.pulseroller.com

Singapore

Rollflex Pte. Ltd.

Address: Blk 22, Woodlands Link, #04-70, Singapore 738734

Tel: +0065-62570811

Fax: +0065-62573811

E-mail: sales.sg@rollflexmfg.com

Web: www.rollflexmfg.com

Indonesia

PT. Rollflex Manufacturing Indonesia

Address: Taman Tekno BSD, Sektor XI Blok H-11 No. 7 Serpong, Tangerang 15314

Tel: +006221-36720399

Fax: +006221-36720388

E-mail: sales.id@rollflexmfg.com

Web: www.rollflexmfg.com

Malaysia

Rollflex (M) Sdn.Bhd.

Address: Lot 58908, No. 3399, Jalan Pekeliling Tanjung 27/2 Kawasan Perindustrian Indahpura, 81000 Kulai, Johor, Malaysia.

Tel: +006012-7272896

E-mail: sales.my@rollflexmfg.com

Web: www.rollflexmfg.com

Because the printed copy is updated slowly,
so for the newest product informations, pls refer to the official website.