

External Brake Roller (BT120)




- Suitable for European standard / Australian standard pallets, Nine-foot pallets.



Dimensional Drawing

BT120

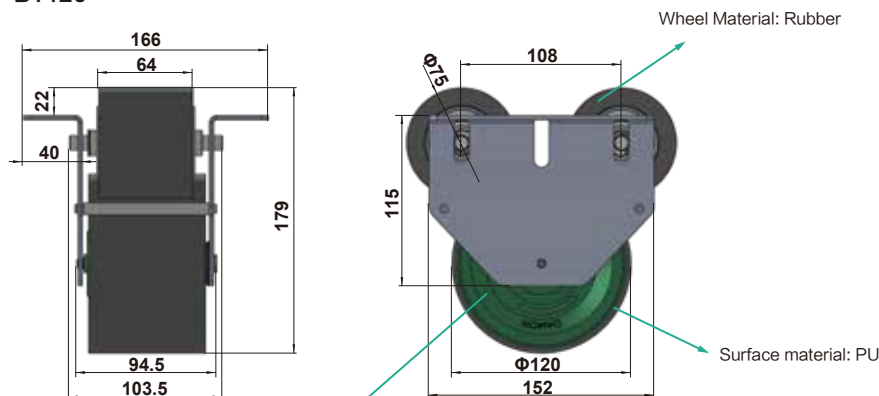

Direction of arrow on the end cap should be the same as brake roller's rotate direction



*Wrong install direction will cause goods outrush risk by brake roller malfunction.

Specifications

Model	Weight Range
BT120/AA	200~500kg
BT120/BA	500~1000kg

Order Example

* BT120 tandem brake is suitable for pallet wheel track.

BT	120	A	A
Model	OD	Object Weight	Direction of Rotation
BT	120	A : 200~500kgs B : 500~1000kgs	A:Standard

Suggestion

- 1.Gravity wheel flow rack's slope range as 1.5~2.3° .Pallet weight please check specifications table.
- 2.Pitch of adjacent brake rollers should be less than the depth of pallet in flow direction, avoid accelerated speed and impact during flowing.
- 3.Please apply few brake rollers in actual weight and slope on gravity rack for test before bulk installation.
- 4.When you meet special application (heavy weight big slope or light weight small slope), please contact us for consultation.

*Environmental Tempreature: -5℃ ~ +40℃, Humidity: 30% ~ 70% RH without condensation.